

LIGHT CONCRETE COMPACT SUBSTATION PKP



THE DEMAND-ORIENTED LOCAL GRID AND CUSTOMER SUBSTATION WITH FLEXIBLE INTERIOR CONFIGURATION

Manufactured in accordance with IEC 62271-202
(VDE 0670-202)

Suitable for use with transformers up to 630 kVA
(optionally up to 1000 kVA)

Arc tested with various MV switchgear, including: ABB
Safe-Ring / Safe Plus, Ormazabal GAE, Siemens 8DJH
Störlichtbogengeprüft mit diversen luftisolierten



Arc tested with various air-insulated MV metering
panels, including: Elley MF10/20, Ormazabal GAE-1Mx

Manufactured in accordance with the 26th German
Federal Immission Control Ordinance (BimSchV)

Delivery with complete electrical configuration ready
for connection

COMPETENCY
RIGHT FROM
THE START

PKP Technical Drawing

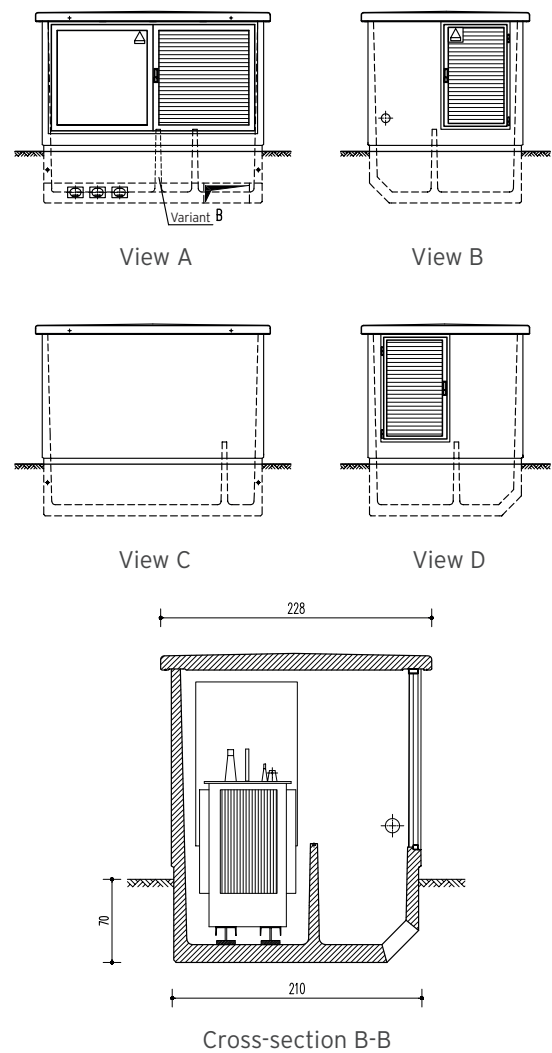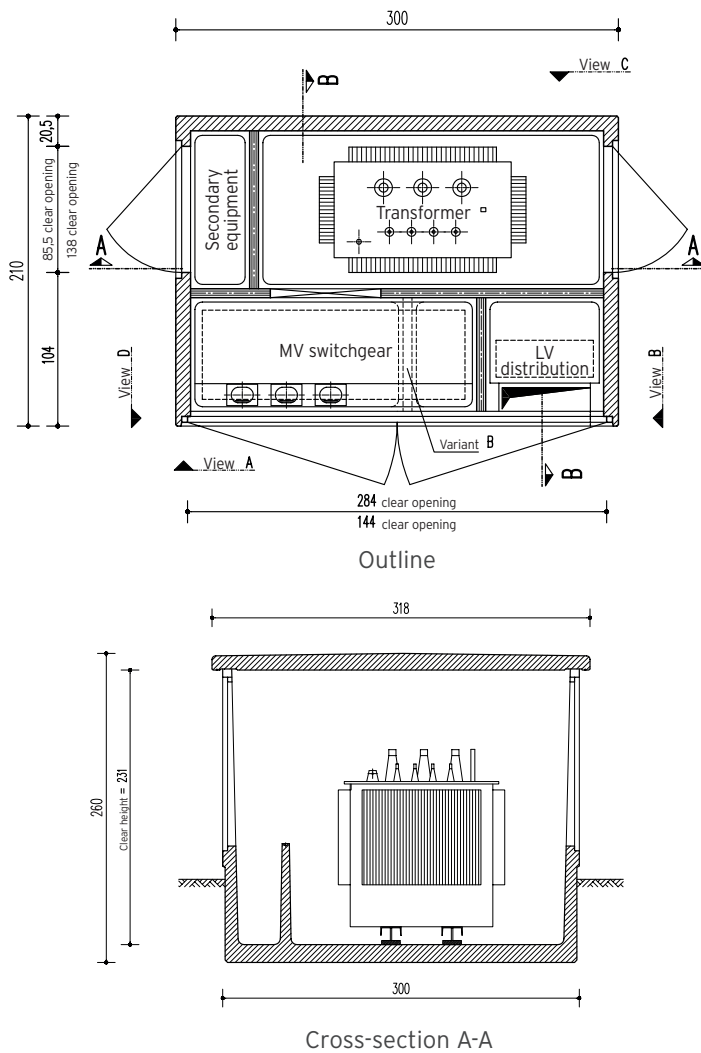

PKP TECHNICAL DATA

Enclosure class:	K10, K15 or K20 (depending on transformer dissipation class)
Protection rating:	IP23D as per EN 62271-202 (higher protection rating optionally available)
External dimensions:	W x D x H = 3.000 x 2.100 x 2.600 mm (plus 90 mm roof overhang all round)
Installation excavation depth:	approx. 700 mm
Height above ground level:	approx. 1.880 mm
Weight:	Total empty weight: approx. 7.8 t (including 2.3 t roof weight)
Lifting fittings:	substation fittings: 4x SL30; roof fittings: 4x RD18

MAXIMUM SPECIFICATIONS OF INSTALLED COMPONENTS

Transformer	MV switchgear	LV distribution	Secondary equipment
630 kVA ⁽¹⁾	SF6 gas insulated; air insulated	Distribution frame	Distribution cabinet
H _{max} = 2.000 mm	H _{max} = 1.400 mm	H _{max} = 1.400 mm	H _{max} = 1.350 mm
L _{max} = 1.800 mm	D _{max} = 800 mm	D _{max} = 700 mm	D _{max} = 380 mm
W _{max} = 1.000 mm	W _{max} = 1.950 mm (variant A)	W _{max} = 800 mm (variant A)	W _{max} = 850 mm
	W _{max} = 1.450 mm (variant B)	W _{max} = 1.300 mm (variant B)	

⁽¹⁾ An 800 kVA or 1000 kVA version of the substation is available on request.



1. SUBSTATION DESCRIPTION

The PKP compact substation is a highly versatile, space-saving local grid and customer substation with many configuration options. It is designed for use at power levels up to 630 kVA (optionally up to 1000 kVA). The substation is produced in compliance with relevant standards and regulations such as IEC, DIN, VDE and UVV, including the following standards in particular:

- IEC 62271-202 (VDE 0671-202)
- DIN 1045: 2008-08
- 26. BimSchV
(26th German Federal Immission Control Ordinance)
- WHG (German Water Resources Act)

The substation has been arc tested (in accordance with classification IAC AB 20 kA 1s) with all usual makes of switchgear, including ABB, Ormazabal and Siemens. Arc-tested air-insulated metering panels from Elley and Ormazabal with classification IAC AB 20 kA 1s can also be used.

2. CONSTRUCTION

The substation consists of two monolithic prefabricated concrete sections (body and roof). The MV cables are fed in through watertight entry systems (e.g. Hauff). LV cables can be fed in through a downward-facing open cable duct. LV cable entry using watertight entry systems is also available as an option.

The external surface of the substation can be finished individually as desired by the customer. The available options are exposed aggregate concrete, fair-faced concrete, float-finish and roll-on stucco with a choice of colours from the RAL colour card, brick tile cladding and other special finishes.

3. DOORS AND VENTILATION

All substation doors and ventilation components originating from our own production can be made from galvanised steel or aluminium as desired. The doors are equipped with a door stay, copper earthing strip and pivoting bolt lock for one or two profile cylinders. Two-point locking mechanisms for each door leaf prevent arcing with the doors closed.

The ventilation grilles are protected against penetration by objects and can optionally be fitted with insect screens.

4. ELECTRICAL CONFIGURATION

Electrical configuration of the substation with the medium-voltage switchgear, transformer, low-voltage distribution, secondary equipment, MV and LV cables, earthing and so on is performed at the factory according to customer specification and in compliance with IEC 62271-202.

5. TRANSPORT & INSTALLATION

The substation is delivered by truck to the installation site as a complete unit ready for connection and lowered into the prepared excavation using a truck-mounted crane. Four lifting points in the base area are provided for lifting the substation.



Certified compliant with § 19 I WHG
(German Water Resources Act)

Beton-und Energietechnik
Heinrich Gräper GmbH & Co. KG

Ida-Gräper-Weg
D-26197 Ahlhorn, Germany
Phone + 49 (0) 44 35 3 03-0
Fax + 49 (0) 44 35 3 03-20
www.graeper.de

Beton- und Energietechnik
Heinrich Gräper GmbH & Co. KG

Am Buchweizenberg 11-12
D-16909 Heiligengrabe, Germany
Phone + 49 (0) 3 39 62 7 08-0
Fax + 49 (0) 3 39 62 7 08-19
www.graeper.de

Ernst Elley GmbH & Co. KG

Zinnhütte 2-4
D-21255 Tostedt, Germany
Phone + 49 (0) 41 82 28 40-0
Fax + 49 (0) 41 82 28 40-10
www.elley.de

AKA Alberts und Klufft B.V.

Industrieterrein De Vaart
Keersluisweg 41
NL-1332 EE Almere, Netherlands
Phone + 31 (0)36 5 49 50 60
www.albertsenklufft.nl

